


# COMBINATION D-SUB CONTACTS

## High power contacts – Solder pin – Straight

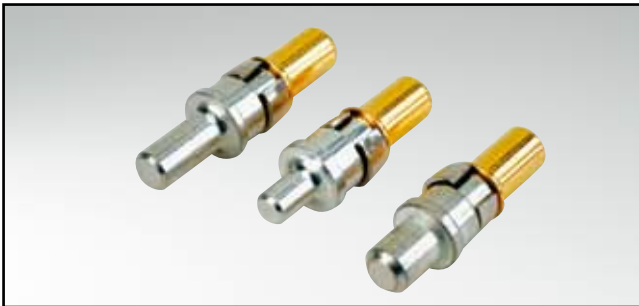


RoHS compliant – CSA listed, File No.: LR 115000-1 – UL listed, File No.: E202784

### DESCRIPTION


- Precision machined contacts
- Quality class 3: 50 mating cycles (gold plated)
- Quality class 1: 500 mating cycles (gold plated)
- Premating make before break contacts available (Consult factory)

### PRODUCT DRAWING

Socket contact



Plug contact



Current rating	Termination	A	B	C	Ø D
20 A	48	15.84	4.60	15.98	1.95
20 A	49	16.84	5.30	16.98	2.60
20 A	50/70	16.24	4.70	16.38	2.85
30 A	51/71	19.04	7.50	19.18	3.18
40 A	52/72	17.29	5.75	17.43	3.75

### ORDER DATA

HIGH POWER CONTACT		Quality class 3	Quality class 1
Solder tail diameter D	Current rating	Code	Code
.077" / 1.95 mm	20 A	68	48
.102" / 2.60 mm	20 A	69	49
.112" / 2.85 mm	20 A	70	50
.125" / 3.18 mm	30 A	71	51
.148" / 3.75 mm	40 A	72	52

For other contact configurations refer to part number creator.